


CHARACTERISTICS


Impedance [Ω]	$7.5 \pm 15\%$ (@ 3kHz)
SPL [dB rel 20 μ Pa]	113dB ± 3 dB (1cm/2.0 Vrms in 1cc box) @ 1 kHz
Resonance Frequency [Hz]	$800 \pm 20\%$ (2.0 Vrms/in 1cc box)
Total Harmonic Distortion [%]	Upper limit for THD shown in graph.
Input Power (nom./max) [W]	With 1cc back cavity: 0.5/1.0
Termination*	Leaf spring

*For other termination options please contact sales@owolff.com or your local Ole Wolff representative.

PHYSICAL DIMENSIONS [mm]

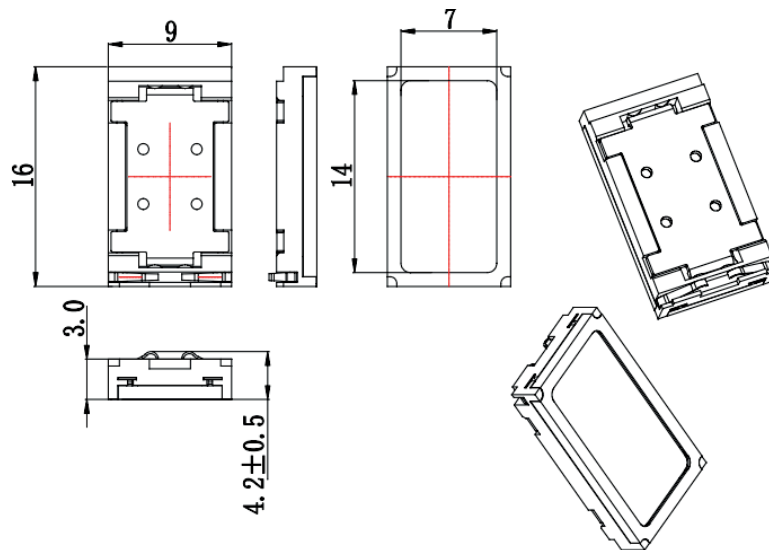

GRAPHS

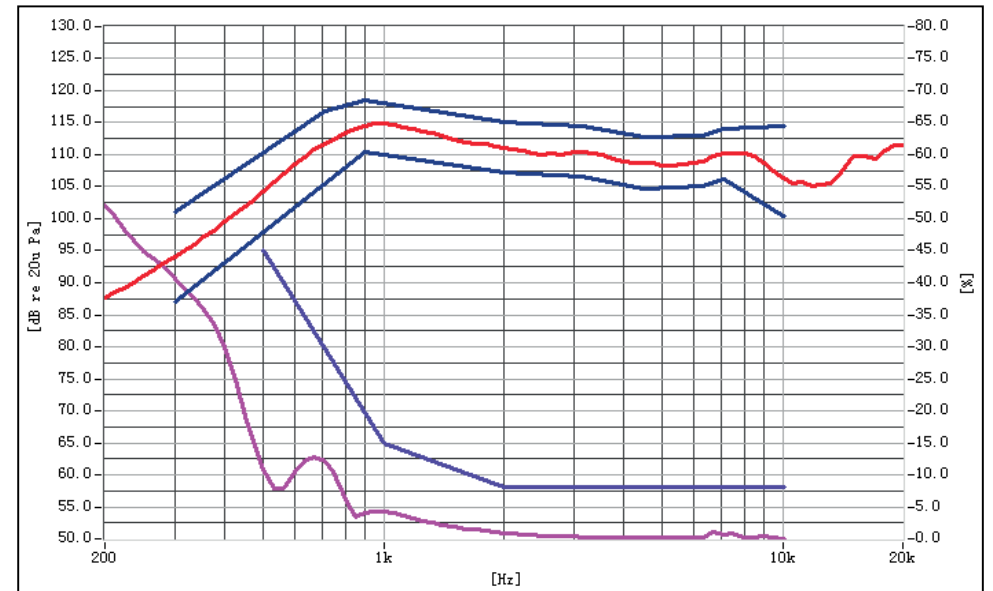

F&R Mask:

F.Point	300	700	900	2000	3.15	4.5	6.3	7.1	10	Hz
Upper Limit	+7	+5	+4	+4	+4	+4	+4	+4	+8	dB
Lower Limit	-7	-	-4	-4	-4	-4	-4	-4	-6	dB

THD Mask:

F.Point	500	1000	2000	10000	Hz
Upper Limit	45	15	8	8	%