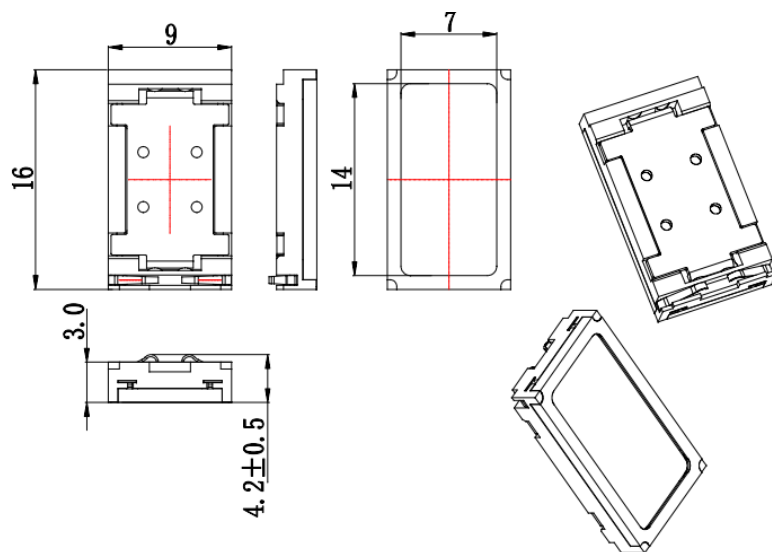
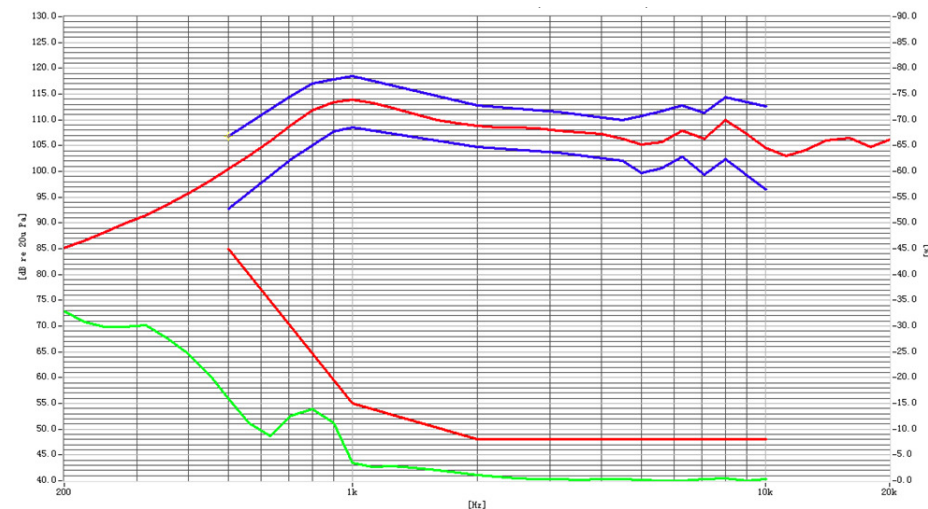


CHARACTERISTICS

Impedance [Ω]	7.5 \pm 15% (@ 3kHz)
SPL [dB rel 20 μ Pa]	109dB \pm 3 dB (1cm/2.0 Vrms in 1cc box) @ 2 kHz
Resonance Frequency [Hz]	850 \pm 20% (2.0 Vrms/in 1cc box)
Total Harmonic Distortion [%]	Upper limit for THD shown in graph.
Input Power (nom./max) [W]	With 1cc back cavity: 0.5/1.0
Termination*	Leaf spring

*For other termination options please contact sales@owolff.com or your local Ole Wolff representative.

PHYSICAL DIMENSIONS [mm]

GRAPHS

F&R Mask:

F.Point	500	700	800	900	1k	2k	3.15k	4.5k	5k	5.6k	6.3k	7.1k	8k	10k	Hz
Upper Limit	+7	+6	+6	+5	+5	+4	+4	+4	+5	+5	+5	+6	+6	+8	dB
Lower Limit	-7	-	-	-5	-5	-4	-4	-4	-5	-5	-5	-6	-6	-6	dB

THD Mask:

F.Point	500	1000	2000	10000	Hz
Upper Limit	45	15	8	8	%