



DYNAMIC SPEAKER OWS-2810T-4




The **OWS-2810T-4** high-power speaker. Perfect for IoT devices and other products when high output from a small package is essential.

CHARACTERISTICS

Impedance [Ω]	$4 \pm 15\%$ @ 1 kHz
SPL [dB rel 20 μ Pa]	98 ± 3 @ 0.8 kHz—1.5 kHz(average) Input 2.83 V/0.1m
Resonance Frequency [Hz]	$300 \pm 20\%$
Total Harmonic Distortion [%]	As shown in graph
Input Power (nom./max) [W]	2/3
Termination*	Terminals

*For other termination options please contact sales@owolff.com or your local Ole Wolff representative.


PHYSICAL DIMENSIONS [mm]

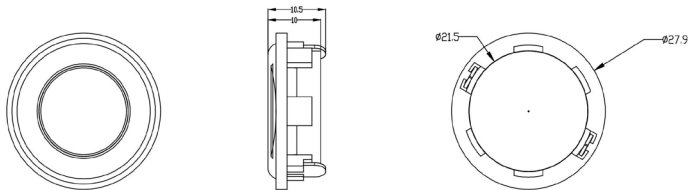

GRAPHS

Test conditions: 2.83V / 0.1m

Frequency response

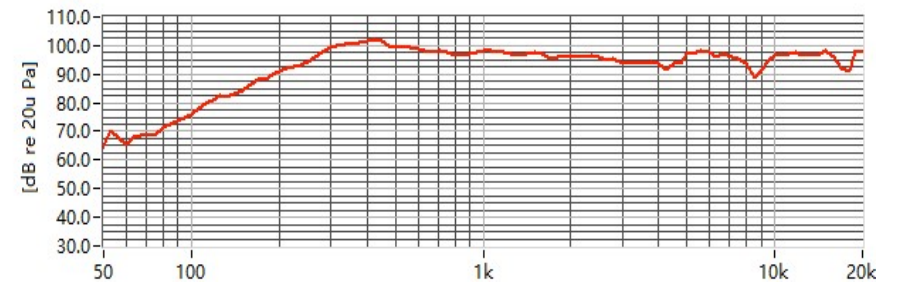

Total Harmonic Distortion

