



# OLE WOLFF

## DYNAMIC SPEAKER OWS-2810T-4




The **OWS-2810T-4** high-power speaker. Perfect for IoT devices and other products when high output from a small package is essential.

### CHARACTERISTICS

Impedance [ $\Omega$ ]	4 $\pm$ 15% @ 1 kHz
SPL [dB rel 20 $\mu$ Pa]	98 $\pm$ 3 @ 0.8 kHz—1.5 kHz( average) Input 2.83 V/0.1m
Resonance Frequency [Hz]	300 $\pm$ 20%
Total Harmonic Distortion [%]	As shown in graph
Input Power (nom./max) [W]	2/3
Termination*	Terminals

\*For other termination options please contact sales@owolff.com or your local Ole Wolff representative.


### PHYSICAL DIMENSIONS [mm]

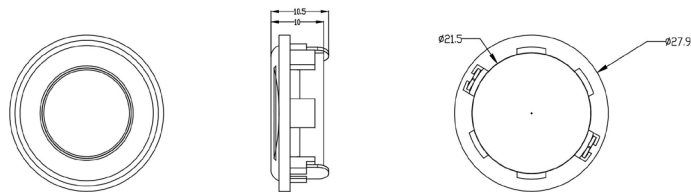

### GRAPHS

Test conditions: 2.83V / 0.1m

#### Frequency response

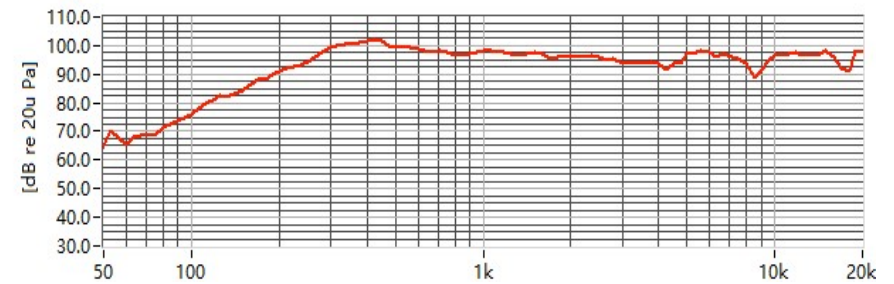

#### Total Harmonic Distortion

