


### CHARACTERISTICS


Impedance [ $\Omega$ ]	4 $\pm$ 15% (at 2 kHz)
SPL [dB rel 20 $\mu$ Pa]	106 $\pm$ 3 at 1 kHz, Input 0.5W / 0.05 m
Resonance Frequency [Hz]	370 $\pm$ 20%, Input 2.0 V (0.5W)
Total Harmonic Distortion [%]	As shown in graph
Input Power (nom./max) [W]	2.5 / 3.5
Termination*	Terminals

\*For other termination options please contact sales@owolff.com or your local Ole Wolff representative.

### PHYSICAL DIMENSIONS [mm]

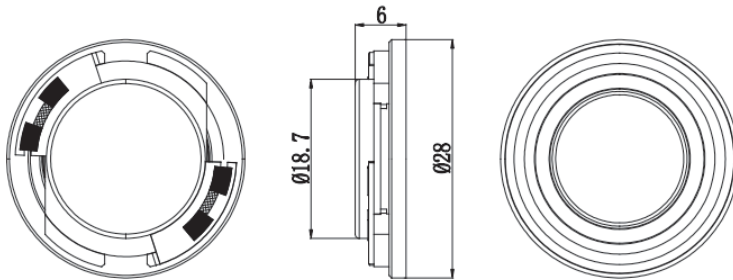

### GRAPHS

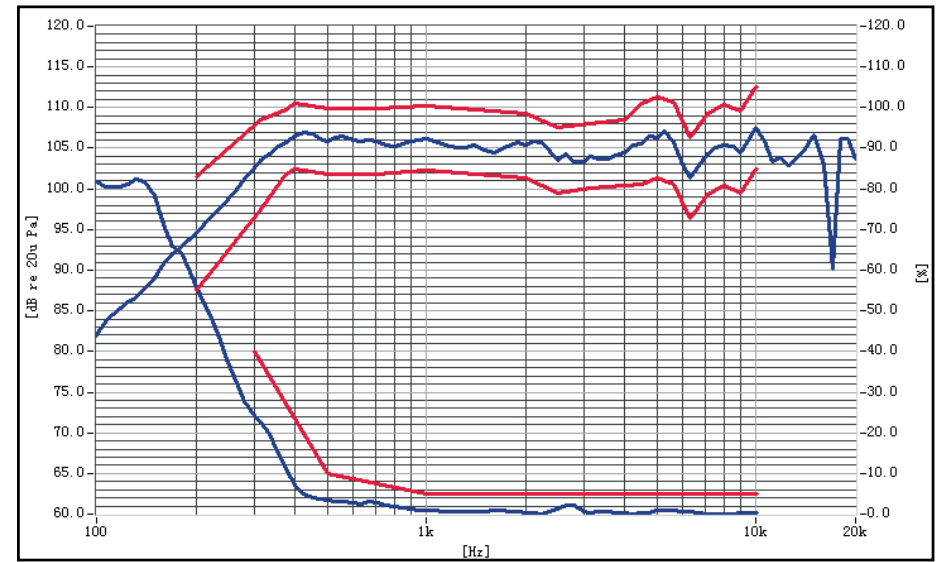

#### F&R Mask:

F.Point	200	315	375	400	500	710	1k	2k	3.15k	4k	4.5k	Hz
Upper Limit	+7	+5	+4	+4	+4	+4	+4	+4	+4	+4	+5	dB
Lower Limit	-7	-	-4	-4	-4	-4	-4	-4	-4	-4	-5	dB

F.Point	5k	5.6k	6.3k	7.1k	8k	9k	10k	Hz
Upper Limit	+5	+5	+8	+6	+7	+7	+7	dB
Lower Limit	-5	-5	-5	-5	-7	-7	-7	dB

#### THD Mask

F.POINT	300	500	1000	10000	Hz
UPPER LIMITS	40	10	5	5	%