


### CHARACTERISTICS


Impedance [ $\Omega$ ]	$4 \pm 15\%$ at 1kHz 1.0V
SPL [dB rel 20 $\mu$ Pa]	$86.5 \pm 3(1W/0.5M)$ Averaged at 300, 400, 600, 800 Hz
Resonance Frequency [Hz]	$150 \pm 20\%$
Total Harmonic Distortion [%]	As shown in graph
Input Power (nom./max) [W]	5 / 10
Termination*	Terminals

\*For other termination options please contact sales@owolff.com or your local Ole Wolff representative.

### PHYSICAL DIMENSIONS [mm]

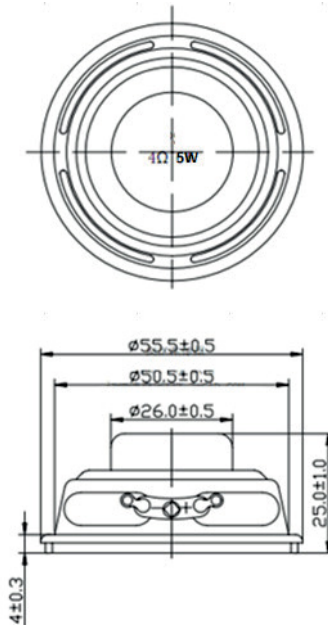

### GRAPHS

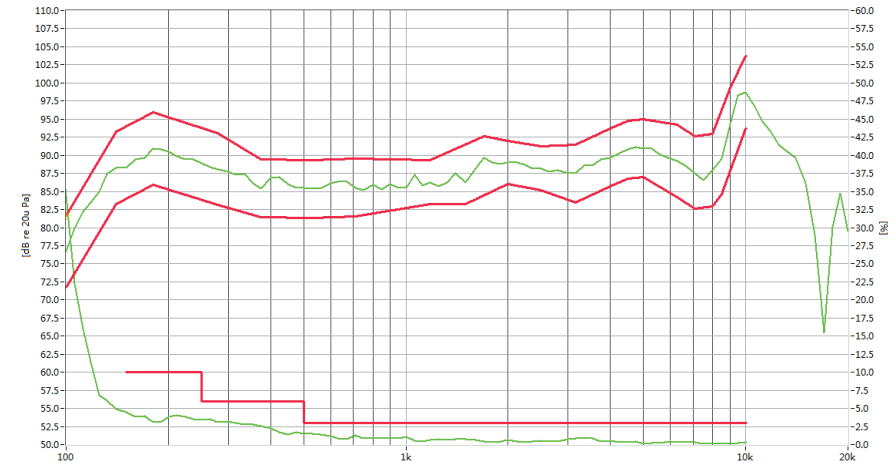

#### FR Mask

F. POINT	100	140	180	280	375	530	710	1.18k	1.5k	1.7k	2.0k	Hz
Upper limit	+5	+5	+5	+5	+4	+4	+4	+3	/	+3	+3	dB
Lower limit	-5	-5	-5	-5	-4	-4	-4	-3	-3	/	-3	dB

F. POINT	2.5k	3.15k	4k	4.5k	5k	6.3k	7.1k	8k	8.5k	9k	10k	Hz
Upper limit	+3	+4	+4	+4	+4	+5	+5	+5	/	+5	+5	dB
Lower limit	-3	-4	-4	-4	-4	-5	-5	-5	-5	/	-5	dB

#### THD Mask

T. POINT	150-250	251-500	501-10000	Hz
UPPER LIMITS	10	6	3	%

The listed product information and data is given in good faith but without warranty.