



OWIEP105S TYPE




FEATURES


1. Various high power inductors are superior to be high saturation for surface mounting.

APPLICATIONS


1. Power supply for VTR, OA equipment.
2. LCD television set, notebook PC.
3. Portable communication, equipments.
4. DC/DC converters, etc.

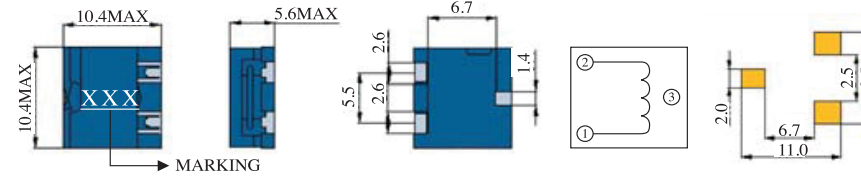

OWIEP105S Inductance decrease by current

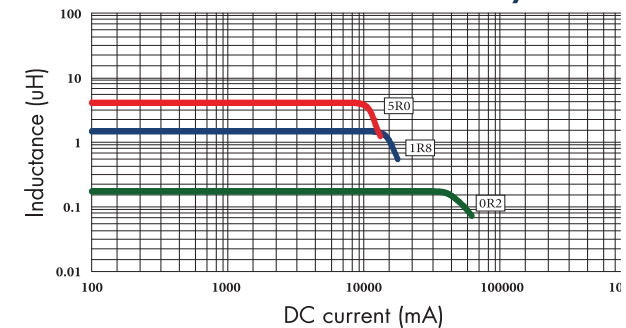

OWIEP105S Temperature rise by current

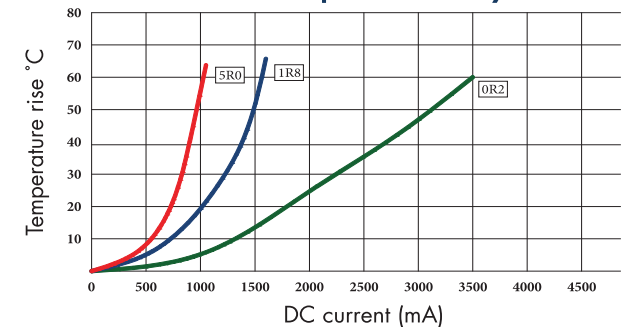

ELECTRICAL CHARACTERISTICS FOR OWIEP105S SERIES

Part Number	Inductance (uH) ⁽¹⁾	Test Frequency	DC Resistance (Ω MAX) ⁽²⁾	Saturation Current (A) ⁽³⁾	Temperature Current (A) ⁽⁴⁾
OWIEP105S-R20	0.2	100KHZ	2.6m	40.0	20.0
OWIEP105S-R40	0.4	100KHZ	3.2m	26.4	18.0
OWIEP105S-R80	0.8	100KHZ	4.1m	20.8	14.0
OWIEP105S-1R3	1.3	100KHZ	5.3m	16.8	13.0
OWIEP105S-1R8	1.8	100KHZ	8.0m	13.8	11.5
OWIEP105S-2R5	2.5	100KHZ	10.5m	11.8	9.00
OWIEP105S-3R2	3.2	100KHZ	12.4m	10.5	8.00
OWIEP105S-4R0	4.0	100KHZ	18.0m	9.3	7.50
OWIEP105S-5R0	5.0	100KHZ	23.8m	8.4	6.65

1. Inductance tested at 0.25V. Tolerance of inductance: 0.22uH: ±30%(N) 0.45uH~5.0uH: ±20%(M)
2. DCR test temp. limits 25 °C.
3. This indicates the value of current when the inductance is 25% lower than its initial value at D.C. superposition or D.C. current
4. To load current onto the components under normal ambient which cause the temp. change as Δt=40 °C or more lower current.
5. Please refer saturated current or the minimum temperature current as standard.